





SHADING CO-EFFICIENT
 The solar heat gain with the blind at the window divided by the solar heat gain with no blind at the window. The lower the shading co-efficient, therefore, the higher the efficiency of the fabric. The test results in the table above have been achieved using a single 6mm glass glazing system.

G TOT
 A measure of total solar energy that passes through the glazing system and the blind fabric.

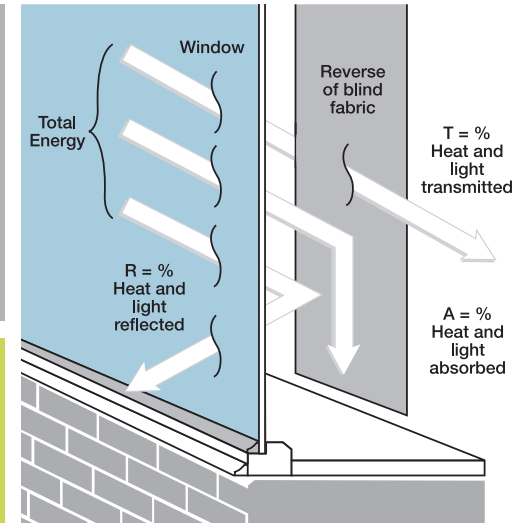

FIRE PROTECTION
 Carnival meets FR standard BS 5867 Part 2 Type B. Further information is available on request.

BLINDS WITH LOUVOLITE® PERFORMANCE FABRICS SUPPLIED BY:



CI/SfB 1976 reference by SfB Agency		
(76.7)	x	



CARNIVAL

PERFORMANCE FABRIC



- Colour Range 48
- Fabric Width 2.05 (80")
- Fabric Composition 100 % Polyester

A1

SOLAR, OPTICAL & COLOUR FASTNESS PROPERTIES

CARNIVAL

	SOLAR			OPTICAL			SC	CF	DIM out	UV block	SG	DG	G TOT	TG	DG LE
	T _s	R _s	A _s	T _o	R _o	A _o									
Birch	19	60	21	13	58	29	0.42	6+	3	100	0.33	0.35	0.36	0.40	
Blossom	22	65	13	17	63	20	0.37	6+	3	99	0.31	0.33	0.34	0.38	
Bonbon	18	52	30	6	30	64	0.50	6	3	100	0.39	0.40	0.41	0.45	
Buttercup	18	65	17	17	76	7	0.37	6	3	100	0.29	0.31	0.33	0.37	
Caramel	13	57	30	5	52	43	0.45	6+	3	100	0.34	0.36	0.38	0.42	
Chartreuse	13	53	34	8	57	35	0.49	6+	3	100	0.36	0.38	0.39	0.43	
Chelsea Red	15	43	42	2	16	82	0.58	6+	3	100	0.35	0.38	0.39	0.43	
China White	15	75	10	13	86	1	0.28	6+	3	100	0.22	0.24	0.22	0.31	
Coral	18	50	32	6	31	63	0.52	6+	3	100	0.39	0.41	0.41	0.45	
Cornflower	15	56	29	5	43	52	0.46	6+	3	100	0.35	0.37	0.38	0.43	
Claret	13	37	50	0	8	92	0.64	6+	3	100	0.45	0.47	0.47	0.52	
Clay	14	49	37	3	32	65	0.53	6+	3	100	0.40	0.42	0.43	0.48	
Cream	16	71	13	16	82	2	0.31	6	3	100	0.25	0.27	0.30	0.334	
Denim	8	39	53	0	12	88	0.62	6+	3	100	0.43	0.46	0.46	0.51	
Ecru	18	36	46	11	70	19	0.65	6+	3	100	0.29	0.31	0.33	0.38	
Fuchsia	16	46	38	2	17	81	0.56	6+	3	100	0.41	0.43	0.43	0.48	
Grape	12	38	50	0	6	94	0.63	6+	3	100	0.44	0.47	0.47	0.52	
Heather	14	60	26	5	49	46	0.42	6	3	100	0.32	0.35	0.37	0.40	
Hessian	17	55	28	8	47	45	0.47	6	2	100	0.32	0.38	0.39	0.43	
Ivory	17	69	14	14	77	9	0.20	6+	3	100	0.26	0.29	0.31	0.35	
Ivy	11	33	56	0	12	88	0.68	6+	3	100	0.47	0.49	0.48	0.54	
Kiwi	14	45	41	6	38	56	0.57	6	3	100	0.41	0.43	0.43	0.48	
Lily	12	56	32	3	52	45	0.46	6+	3	100	0.34	0.36	0.38	0.42	
Lime	14	47	39	77	43	50	0.55	6+	3	100	0.40	0.42	0.43	0.47	
Luna	18	57	25	11	49	40	0.45	6+	3	99	0.36	0.37	0.38	0.42	
Maraschino	11	40	49	1	14	85	0.61	6+	3	100	0.43	0.45	0.46	0.50	
Mink	13	41	46	1	17	82	0.60	6+	3	100	0.34	0.37	0.39	0.42	
Misty Blue	13	56	31	3	45	52	0.46	6	3	100	0.34	0.37	0.38	0.42	
Mulberry	12	48	40	0	23	77	0.54	6+	3	100	0.39	0.42	0.44	0.49	
Navy	10	31	59	0	5	95	0.70	6+	5	100	0.47	0.50	0.49	0.54	
Ochre	15	59	26	5	65	30	0.43	6+	2	100	0.36	0.37	0.38	0.42	
Pacific	14	43	43	1	17	82	0.58	6	3	100	0.42	0.44	0.44	0.49	
Paloma	15	50	35	5	36	59	0.52	6+	3	100	0.39	0.41	0.41	0.45	
Papaya	18	62	20	14	62	24	0.40	6+	3	100	0.32	0.34	0.35	0.39	
Peony	21	61	18	13	53	34	0.41	6+	3	96	0.34	0.36	0.37	0.40	
Pewter	13	39	48	0	15	85	0.62	5	3	100	0.44	0.47	0.46	0.51	
Powder Blue	12	58	30	4	50	46	0.44	6+	3	100	0.35	0.37	0.38	0.42	
Praline	13	44	43	1	26	73	0.57	6+	3	100	0.41	0.44	0.44	0.49	
Purple	13	44	43	0	13	87	0.57	5+	3	100	0.41	0.44	0.44	0.49	
Raven	11	32	57	0	6	94	0.69	6+	5	100	0.44	0.47	0.48	0.52	
Royal	13	36	51	0	11	89	0.26	6+	5	100	0.44	0.47	0.47	0.52	
Scuba	13	44	43	2	13	85	0.57	5+	3	100	0.41	0.43	0.43	0.48	
Spring Green	12	61	27	7	65	28	0.41	6+	3	100	0.31	0.34	0.39	0.43	
Sky	12	59	29	2	47	51	0.43	6	3	100	0.32	0.35	0.37	0.41	
Sunset	17	49	34	6	29	65	0.53	6+	3	100	0.392	0.408	0.414	0.456	
Taupe	15	54	31	5	45	50	0.48	6	3	100	0.359	0.463	0.46	0.509	
Truffle	13	39	48	8	16	76	0.62	6	2	100	0.439	0.463	0.465	0.509	
Willow	17	53	30	10	48	42	0.49	6+	3	100	0.377	0.394	0.401	0.443	

UV Block: the percentage of UV light blocked by the fabric
 GTOT: SG = Single Glazed, DG = Double Glazed, TG = Triple Glazed,
 DG LE = Double Glazed Low Emissivity.

CF: Colour Fastness
 Dim out: 1= High light penetration
 4= Low light penetration
 5= Blackout

T: % Transmittance
 R: % Reflectance
 A: % Absorption
 SC: Shading Co-efficient

S060601-15-Ca




CONTRACTORS



SPECIFIERS




ARCHITECTS




Ivory



Ecru




Lily




Chartreuse




Buttercup




Peony



Papaya




China White




Taupe



Cream




Misty Blue




Lime




Ochre




Blossom




Clay




Birch




Praline




Spring Green




Powder Blue




Scuba




Sunset




Mulberry




Mink




Luna




Truffle




Kiwi




Sky




Pacific




Chelsea Red




Fuchsia



Heather



Paloma




Hessian




Ivy




Denim




Royal




Coral




Claret




Purple




Pewter




Caramel




Willow




Navy




Cornflower




Bonbon



Maraschino



Grape



Raven





CARNIVAL

PERFORMANCE FABRIC



Available for	Roller Roman Panel Vertical
Fabric Composition	100% Polyester
Fabric Width	2.05m (80")
Vertical Louvre Widths	89mm (3½") 127mm (5") other widths available on request
Fabric Weight	270g/m2 (8.0oz/yd2)
Flammability Standards	Complies with BS 5867 (Part 2, Type B)
Colour Fastness	Tested in accordance with BS EN ISO 105-B01:1999
Ultra-Fresh*	An Ultra-Fresh* treated fabric that kills MRSA on contact. Also contains effective antibacterial and antifungal properties to preserve fabric freshness.
Cold Coat Technology (CCT®)	Gives improved performance against total transmitted and radiated heat.
Greenshield	Fabrics featuring the Greenshield mark have been tested to confirm no harmful VOC's or hazardous substances will be released to the environment in quantities that are recognised as potentially dangerous to occupants of dwellings or buildings.
Cleaning	Machine washable (vertical blind fabrics only) See manufacturer's instructions Tested in accordance with BS EN 26330:1994 method 7a
Availability	Ex-stock
Fabric Samples	Available on request

* Ultra-fresh is a registered trademark of Thomson Research Associates, Canada.

-  Flame Retardant
-  Dimout
-  Machine Washable (Vertical Blinds only)
-  Wipe Clean
-  Greenshield
-  Ultra-fresh*

Colours reproduced here may vary from the actual colours due to the limitations of the printing process. Great care has been taken to ensure that the fabric swatches and the information supplied are correct, however specifiers and customers are advised to check the suitability of materials before use.